



欧锐杰照明
OURUIJIE LIGHTING

魔镜
Magic Mirror



WhatsApp



微信 WeChat



Web

浙江欧锐杰照明科技有限公司
ZHEJIANG OURUIJIE LIGHTING TECHNOLOGY CO., LTD.

ADD: 浙江省湖州市紫荆路363号
No.363 Zijing Road, Huzhou, Zhejiang, China
TEL: +86-572-2671833
FAX: +86-572-2671800
P H: +86-15868233820
E-mail: quentin@orjlight.com
quentin.zong@foxmail.com

优异的 工业设计

EXCELLENT INDUSTRIAL DESIGN

纤薄的灯体工艺
ULTRA-SLIM LAMP BODY CRAFTSMANSHIP



隐藏螺丝设计
HIDDEN SCREW DESIGN

超大发光面
EXTRA-LARGE LUMINOUS SURFACE
2100cm²




自清洁功能
SELF-CLEANING FUNCTION

单灯控制 SINGLE LAMP CONTROL


易维护结构 EASY-TO-MAINTAIN STRUCTURE

支持智能化系统搭载，具备单灯独立控制功能，可单独调节开关、亮度、定时，适配智慧园区、智慧市政管控平台。



Supports the integration of intelligent systems and features independent control for each light, allowing for individual adjustment of switching, brightness, and scheduling; compatible with smart campus and smart municipal management platforms.

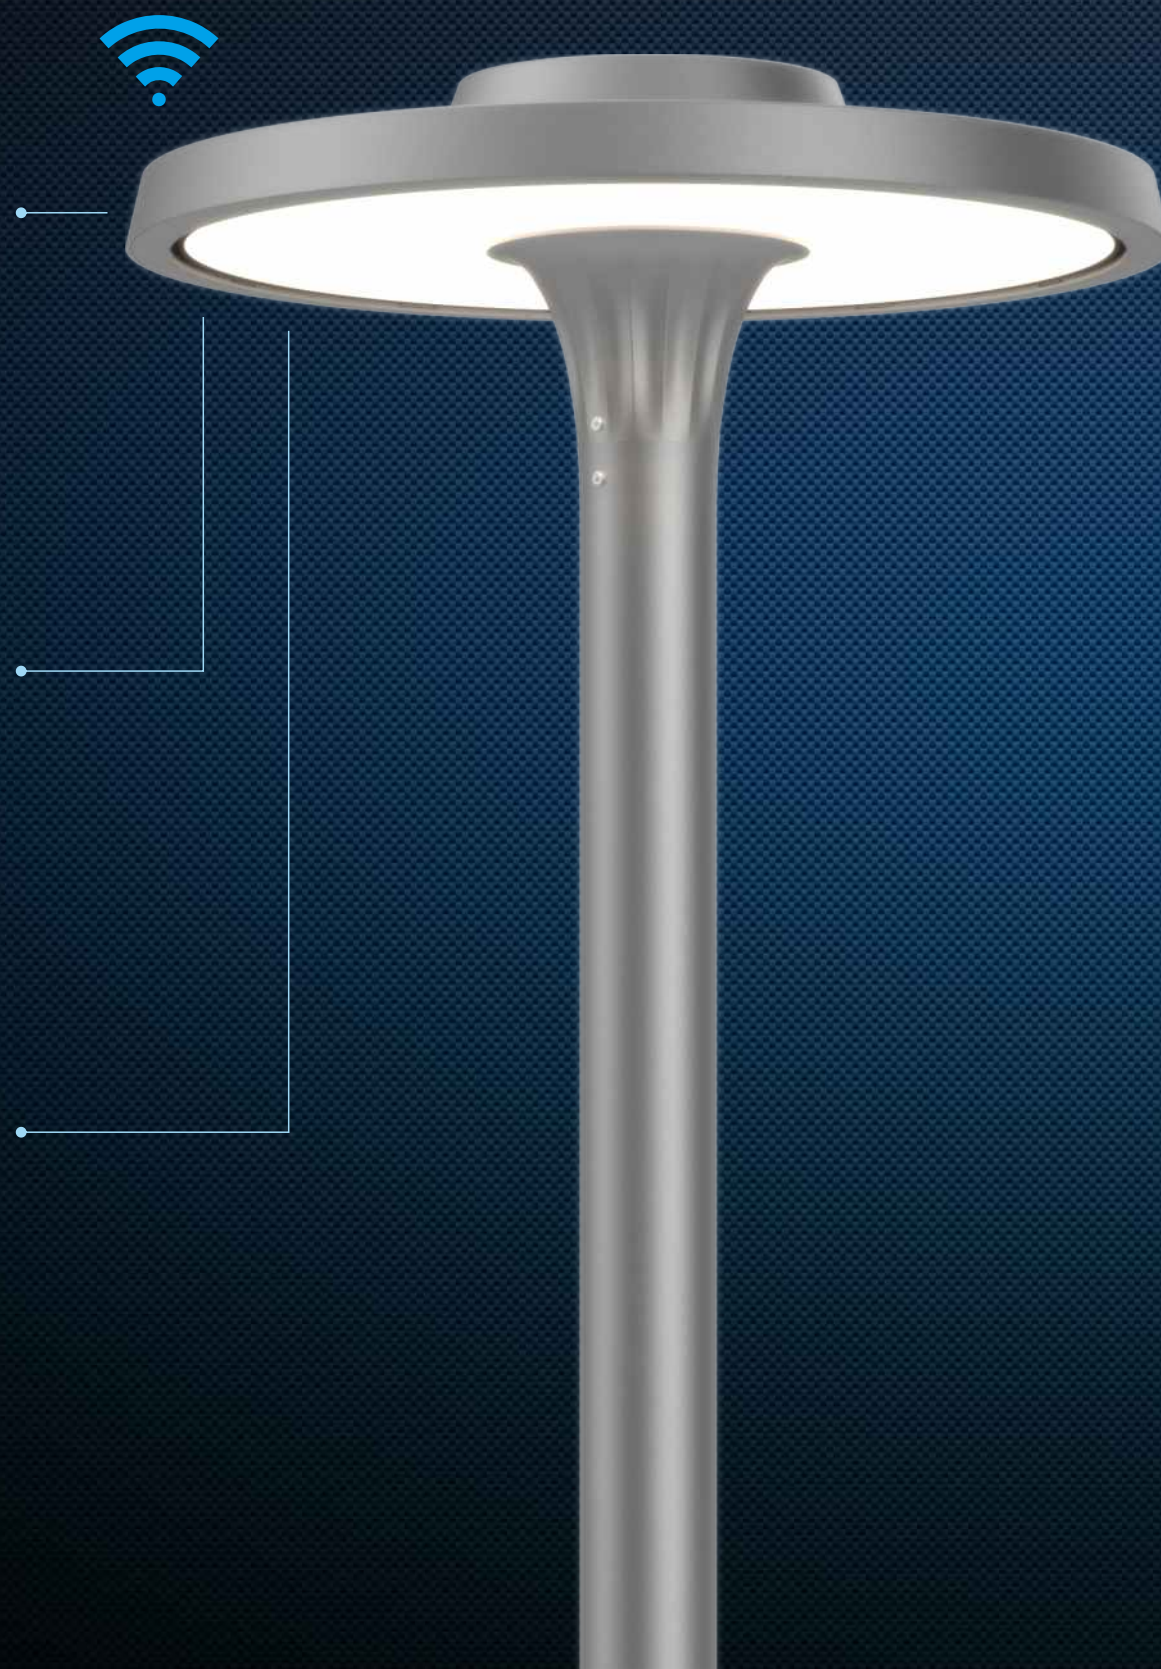

智能光控 Smart Light Control

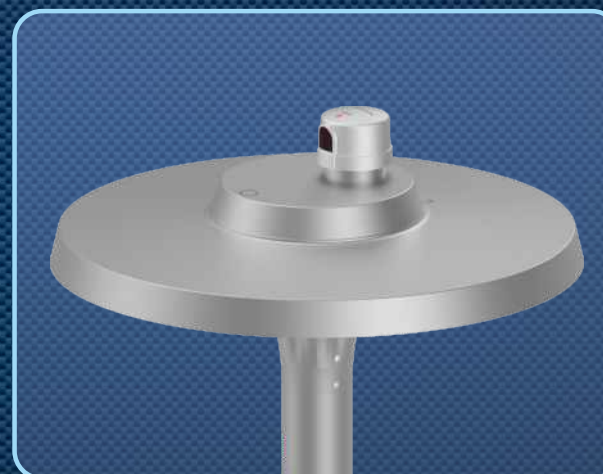

一键开启 One-touch Opening

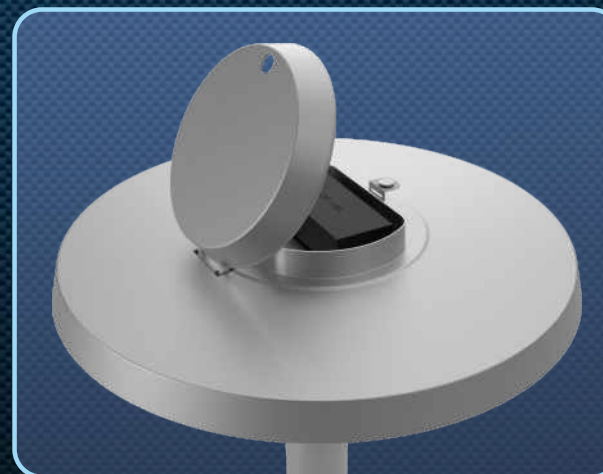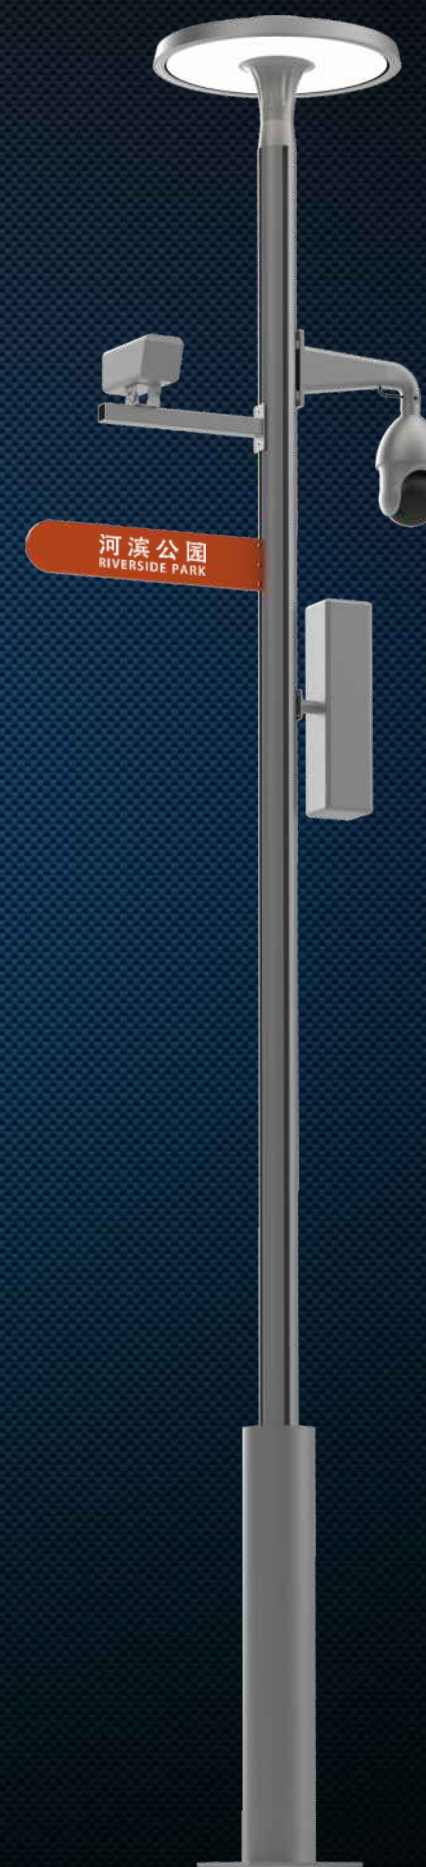

柔和 SOFT LIGHT

高光通 HIGH LUMINOUS FLUX

魔镜
Magic Mirror

光学优势 OPTICAL ADVANTAGES

对比同级庭院照明灯具，本款魔镜庭院灯光通量输出控制更合理，有效弱化强光直射问题，光线柔和不刺眼，大幅降低视觉眩光，视觉舒适度更佳。

Compared to other garden lights in its class, this "Magic Mirror" garden light features more optimized luminous flux control; it effectively mitigates the issue of direct, harsh light, delivering a soft, glare-free glow that significantly enhances visual comfort.


大空间氛围照明 LARGE SPACE AMBIENT LIGHTING

可达 **Ra90**

- 波段微波感应技术
• Microwave sensing technology
- 离线语音控制技术
• Offline voice control technology
- 双重智能融合架构
• Dual-intelligence fusion architecture

魔镜搭载X波段抗干扰微波感应与离线语音控制双重智能系统，支持双模切换。微波感应距离1-5米，可识别人体微动并自动切换灯光模式；自带30秒防重复触发锁定，稳定性更强。同时支持“小橙”语音唤醒，快速切换灯光模式，操控便捷。

The Magic Mirror features a dual-intelligence system combining X-band anti-interference microwave sensing with offline voice control, supporting seamless switching between modes. With a sensing range of 1-5 meters, it detects subtle human movements to automatically adjust lighting modes and includes a 30-second lockout feature to prevent accidental re-triggering, ensuring greater stability. It also supports the "Xiao Cheng" voice wake-up command for quick lighting mode adjustments and convenient operation.

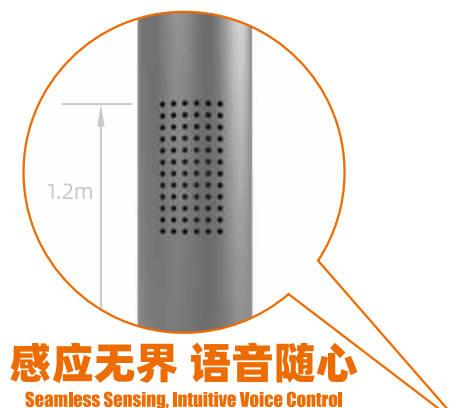

小橙
小橙




不怕干扰 不靠网络

Resistant to interference; does not rely on the internet.

精准感知每一刻，语音掌控每一秒


Precisely sense every moment;
command every second with your voice.

Magic Mirror
魔镜 AI 庭院灯




晴空 Clear Sky

梅雨季湿润开启，通透光效，驱散压抑，日常步道通行；




霞光 Rosy Glow

复刻落日黄昏，阴天补须围感，傍晚休憩漫步；




夏日 Summer

冷调清爽光影，盛夏梅雨季，缓解燥热，夏夜纳凉；




花海 Flower Sea

柔彩渐变，景观打卡，聚会观景，氛围感拉满；



暮秋 Late Autumn

秋日暖金琥珀光，弱化秋夜清冷，适合静坐散步；



破晓 Dawn

模拟黎明微光，凌晨后半夜，柔和低眩光通行照明。

AI 智能光影变

AI LIGHT AND SHADOW COLOR CHANGE

微波感应 MICROWAVE INDUCTION

常态照明输出柔和白光，保障基础夜间通行照明；人体感应触发后灯光切换柔和蓝天白云氛围感或多种内置程序光效，冷暖柔光渐变，兼具功能性照明与景观装饰效果，区别于传统单调庭院灯，氛围感更强，打造沉浸式户外景观体验。

In standard mode, the light emits a soft light to ensure basic nighttime visibility. Upon detecting human presence, it transitions to an atmospheric "soft blue sky and white clouds" effect or various built-in lighting programs featuring smooth gradients between cool and warm tones.




宽幅配光

WIDE LIGHT DISTRIBUTION

宽幅配光，保障照明效果可更大间距安装25米；节约投资。
Wide-angle distribution ensures effective illumination even with a wide mounting spacing of up to 25 meters, thereby reducing investment costs.

魔镜
Magic Mirror

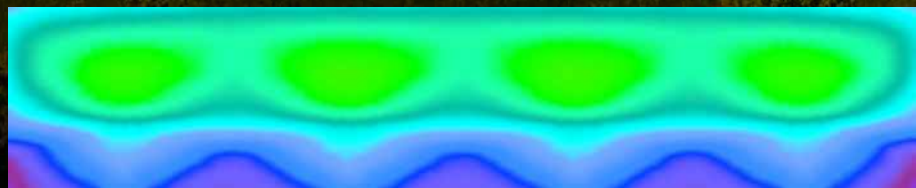


其它
Other



改变色温和亮度以创造适合人与环境的光

ADJUST COLOR TEMPERATURE AND BRIGHTNESS TO CREATE LIGHTING SUITED TO PEOPLE AND THE ENVIRONMENT

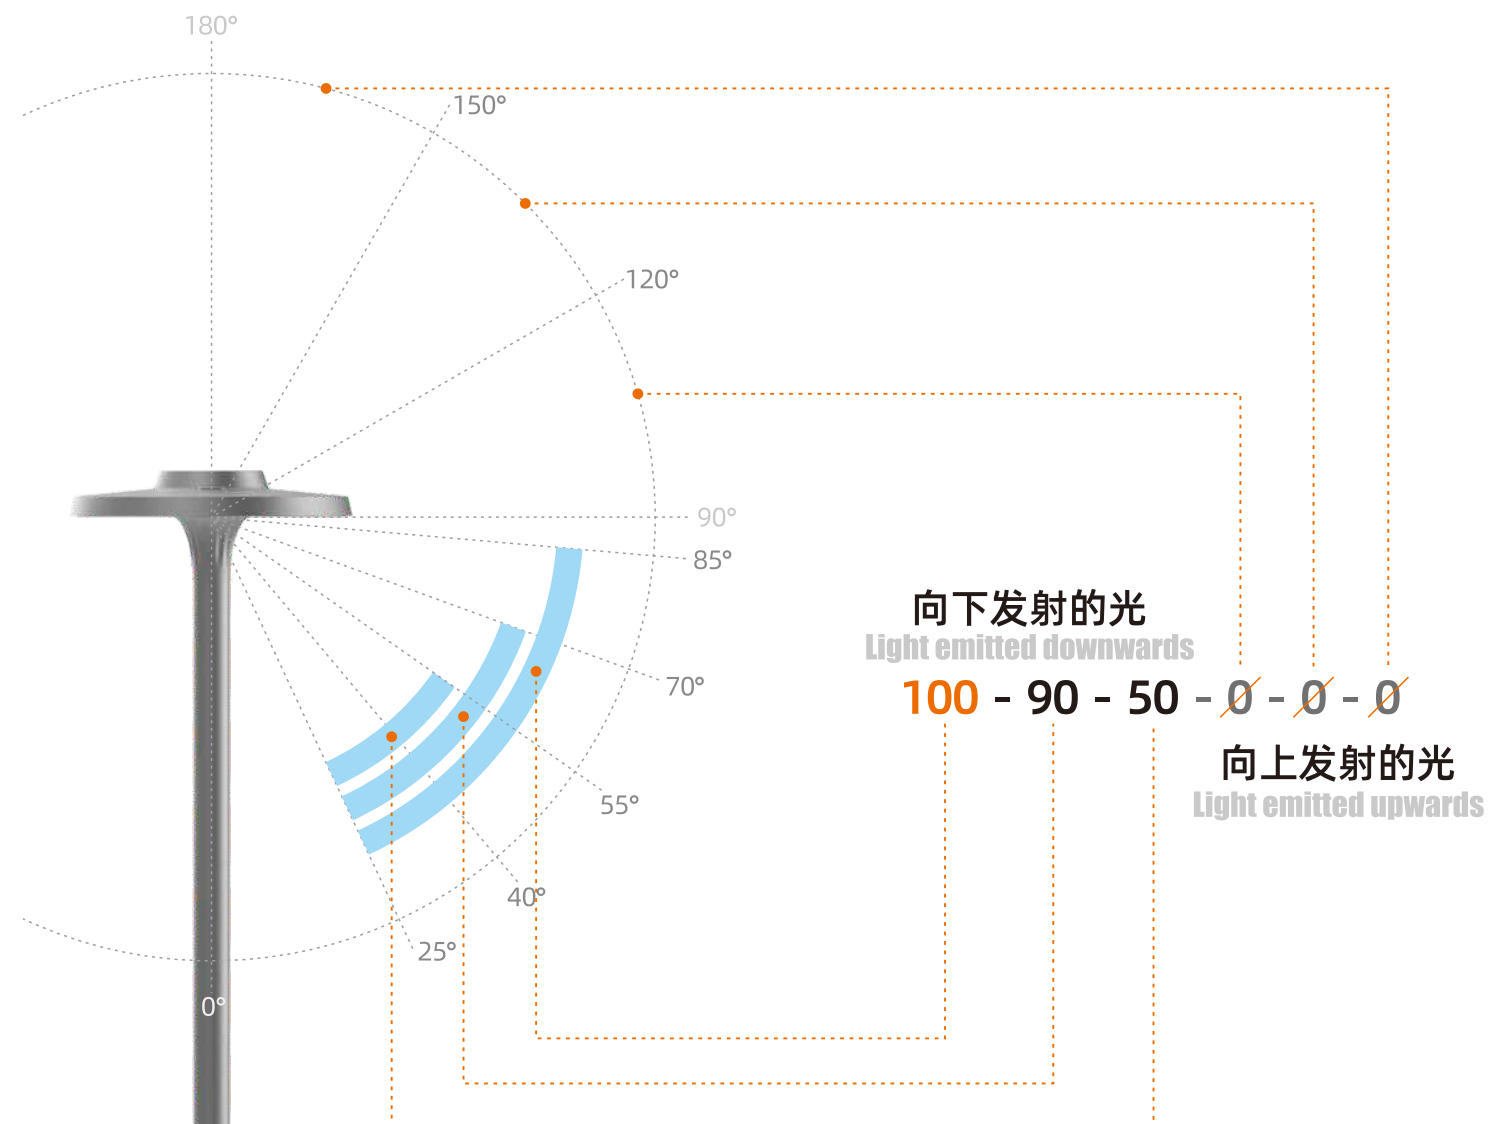

向下发射的光
Light emitted downwards


100 - 90 - 50 - 0 - 0 - 0

向上发射的光
Light emitted upwards

根据GB/T35626-2017《室外照明干扰光限制规范》

保护夜间自然环境，通过高品质户外照明守护暗夜星空，光线只投射到需要照亮的地面，使用截光遮光结构，杜绝向上射向天空的溢光。

Protect the natural night environment and preserve the starry night sky through high-quality outdoor lighting; direct light solely onto the ground areas requiring illumination, and utilize cut-off and shielding structures to completely eliminate upward light spill.

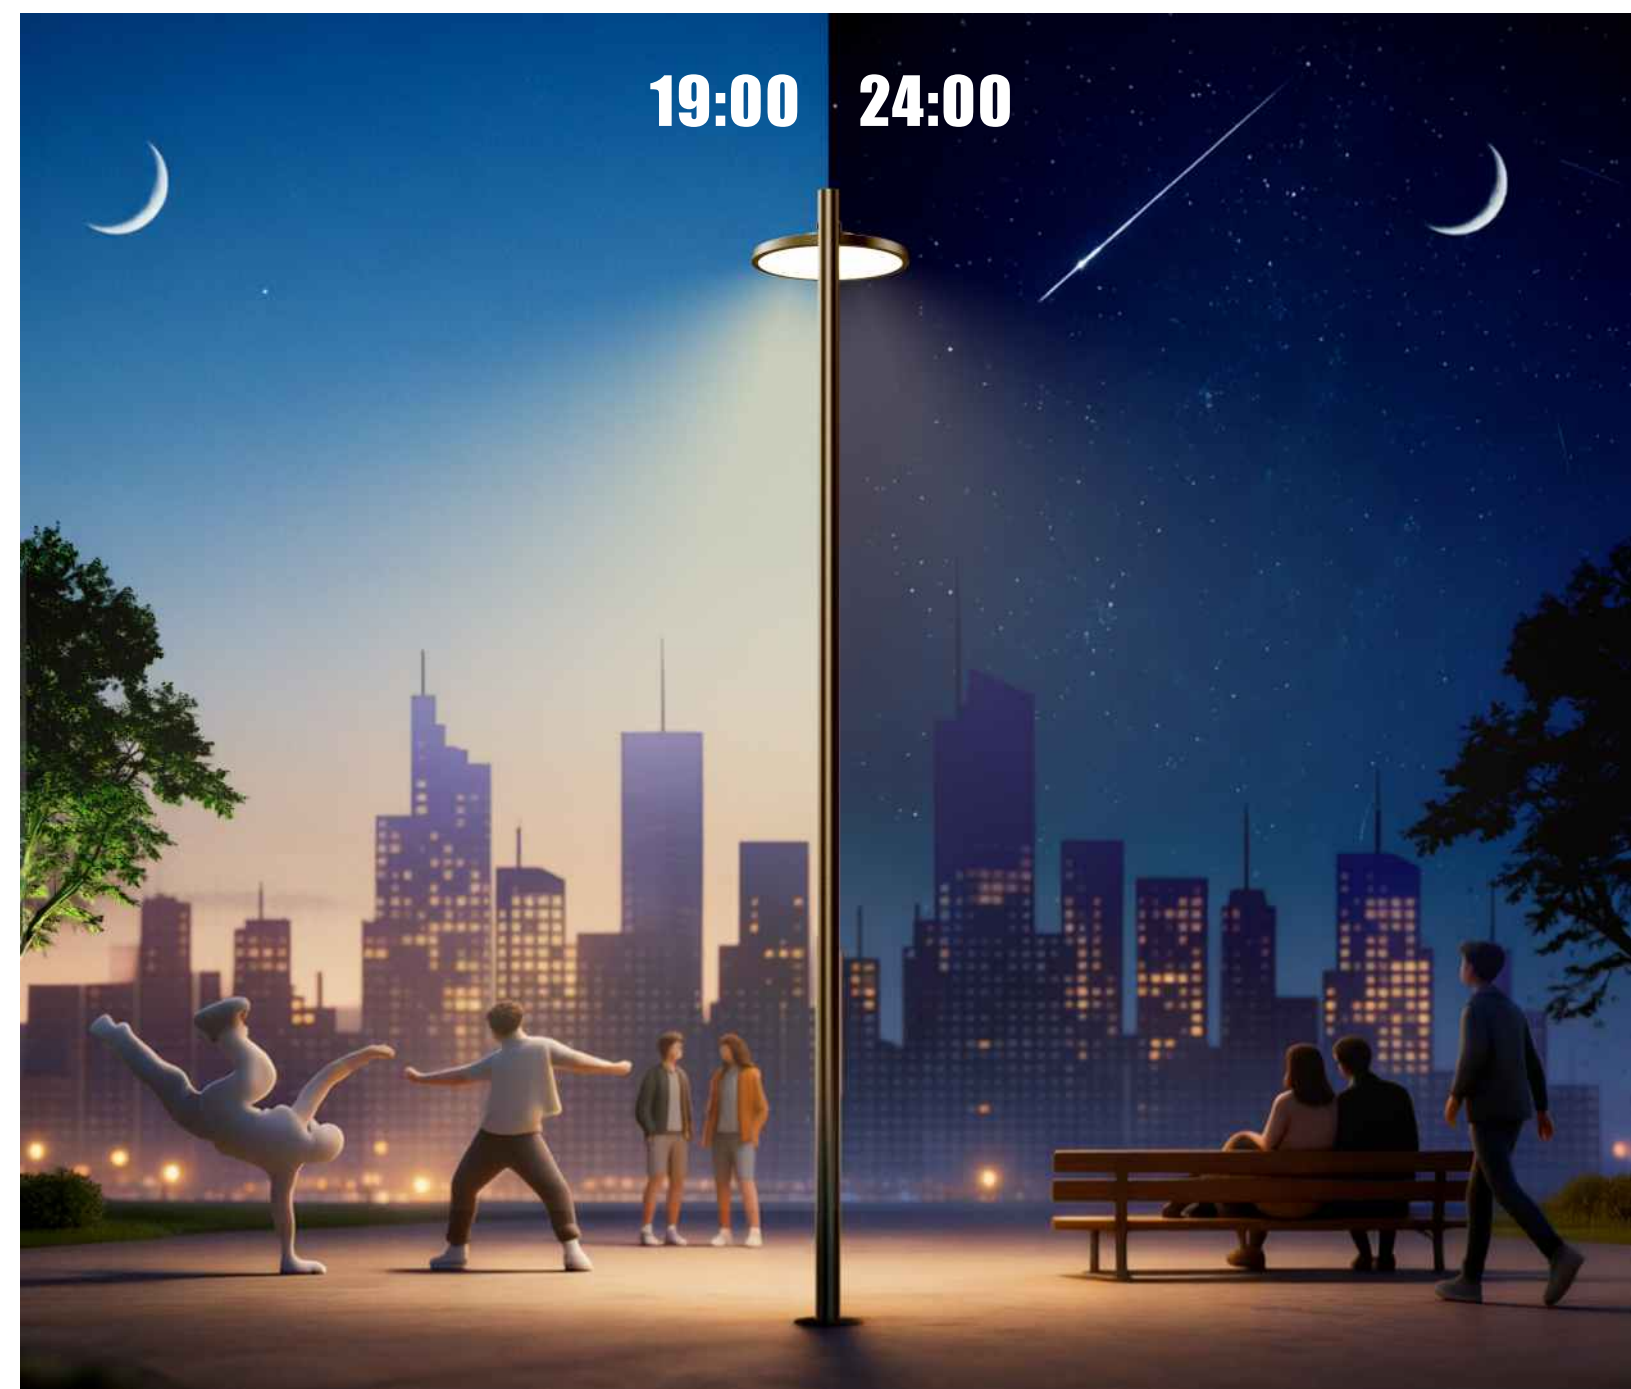

魔镜






Magic Mirror

L07D-A



L07D-A Luminous flux values are based on testing under the conditions of 4000K, DL, and T45.

型号 Type	功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
L07D-030AP0.5S	30W	AC180-277V	3379lm	T15/T2M/T2S/ T3M/T3S/T4S1/ T4S2/90°/120°	Φ60	7.8KG	Φ580×230mm	9.0kg 610×610×270mm (1pcs/box)
L07D-060AP0.5S	60W		6488lm					
L07D-090AP0.5S	90W		9326lm					
L07D-120AP0.5S	120w		11623lm					

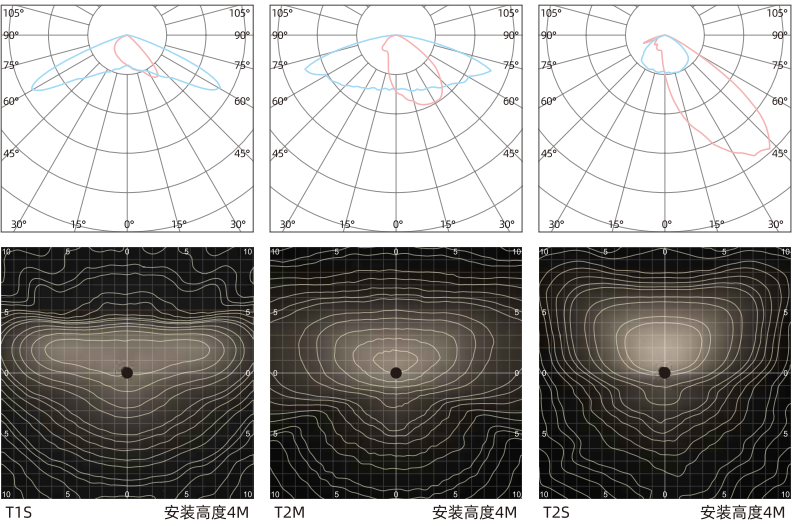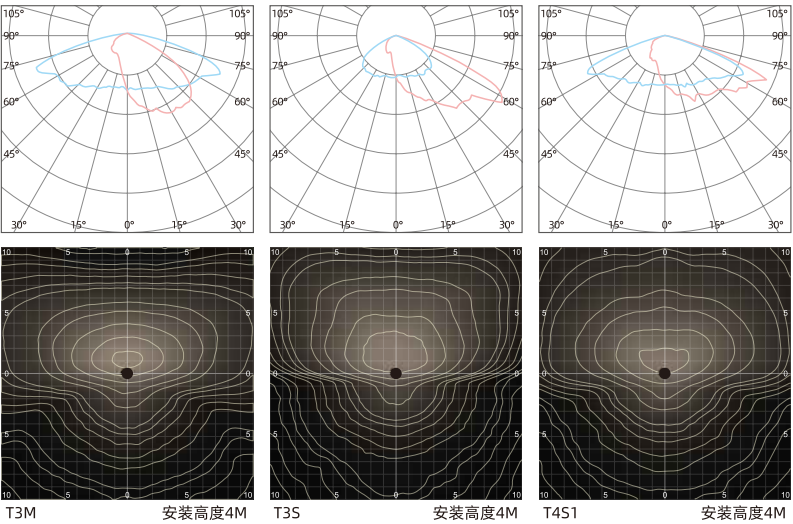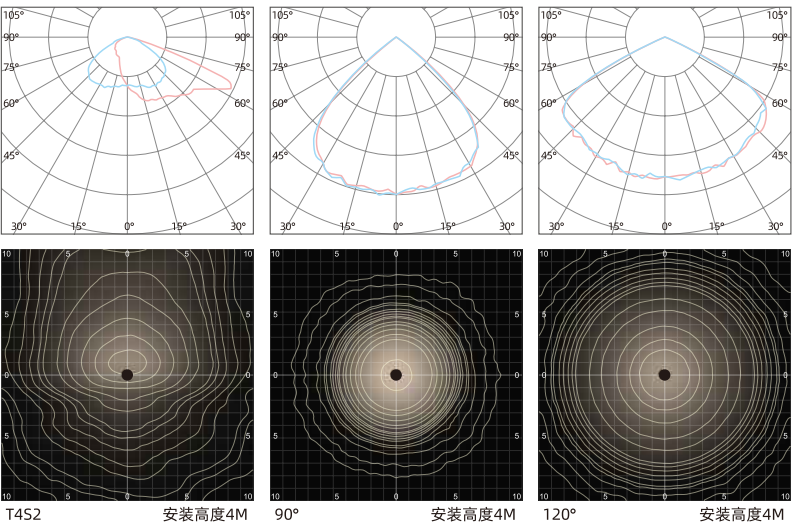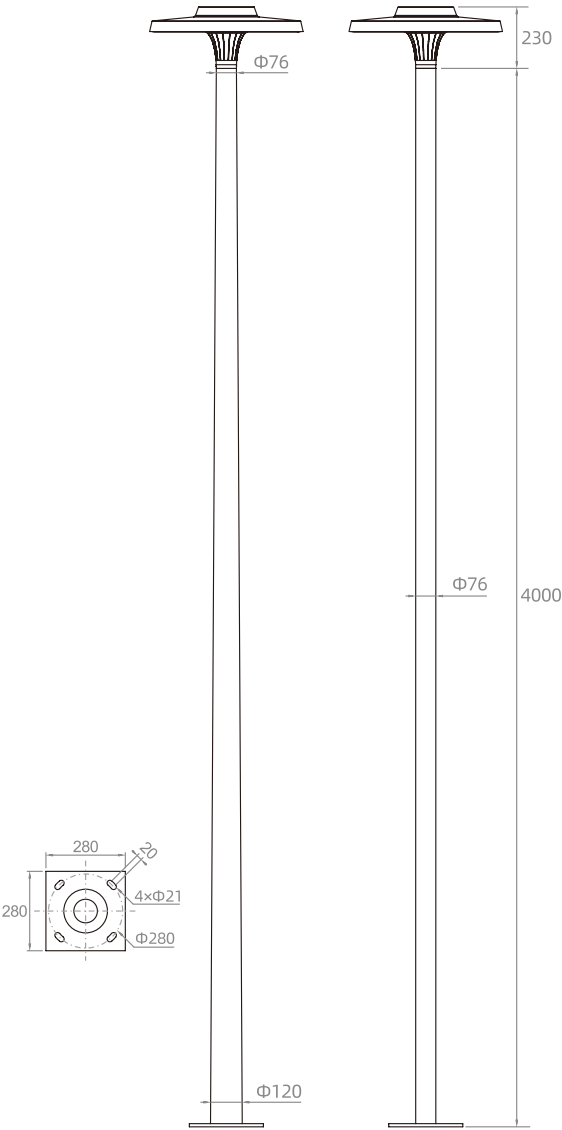




L07D-B







欧锐杰照明
OURUIJIE LIGHTING

L07D-B Luminous flux values are based on testing under the conditions of 4000K, DL, and T45.



型号 Type	功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
L07D-030BP0.5S	30W	AC180-277V	3550lm	T15/T2M/T2S/ T3M/T3S/T4S1/ T4S2/90°/120°	Φ60	8.4KG	Φ580×505mm	9.6kg 610×610×330mm (1pcs/box)
L07D-060BP0.5S	60W		6816lm					
L07D-090BP0.5S	90W		9798lm					
L07D-120BP0.5S	120w		12212lm					





2700/3000/3500/4000K
● ● ● ●

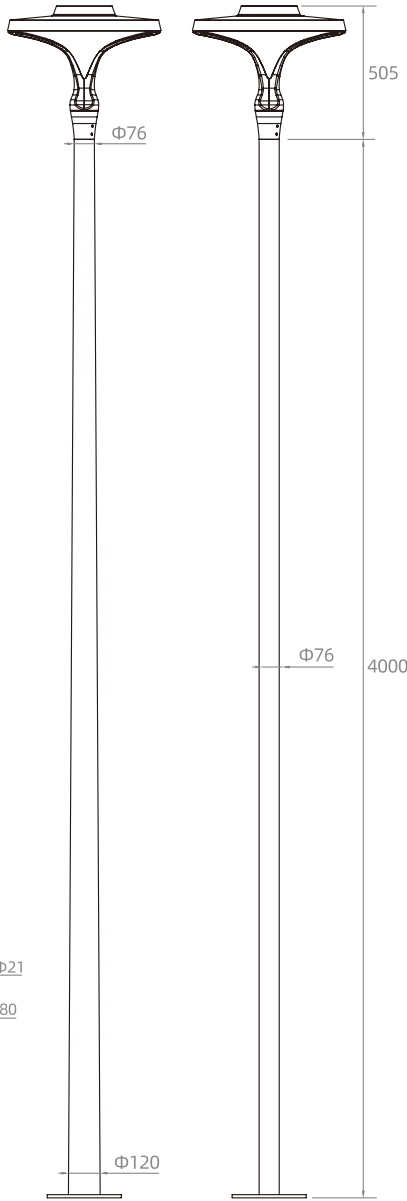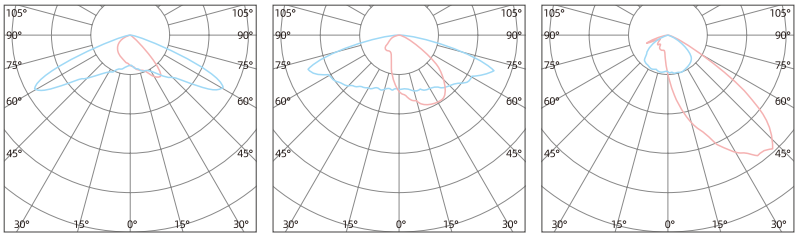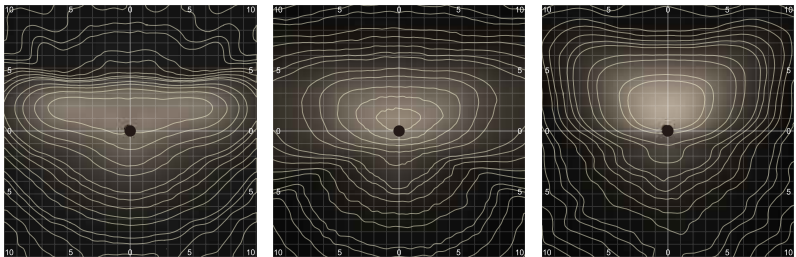

T15 安装高度4M T2M 安装高度4M T2S 安装高度4M

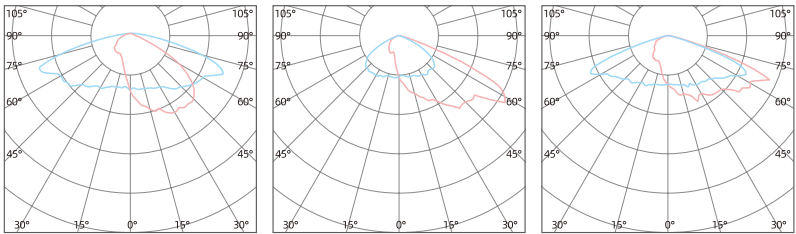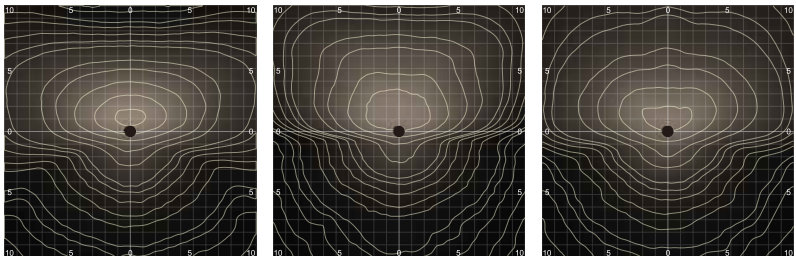

T3M 安装高度4M T3S 安装高度4M T4S1 安装高度4M

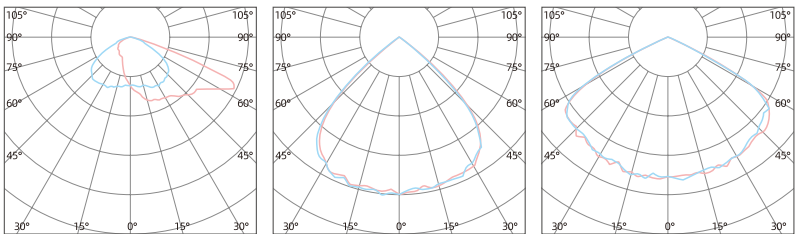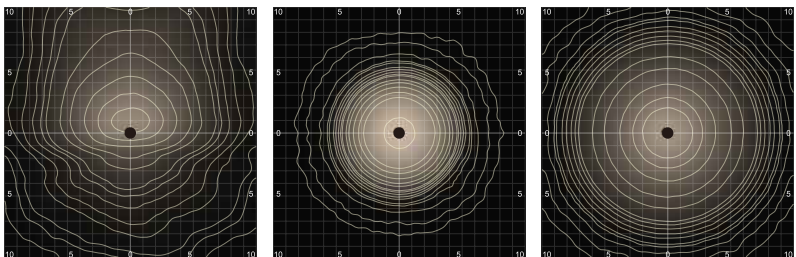

T4S2 安装高度4M 90° 安装高度4M 120° 安装高度4M

魔镜

Magic Mirror


L07D-C





L07D-C

Luminous flux values are based on testing under the conditions of 4000K, DL, and T45.



型号 Type	功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
L07D-030CP0.5S	30W	AC180-277V	3840lm	T15/T2M/T2S/ T3M/T3S/T4S1/ T4S2/90°/120°	Φ60	7.6KG	705×580×100mm	9.2kg 630×630×140mm (1pcs/box)
L07D-060CP0.5S	60W		7373lm					
L07D-090CP0.5S	90W		10598lm					
L07D-120CP0.5S	120w		13209lm					





2700/3000/3500/4000K

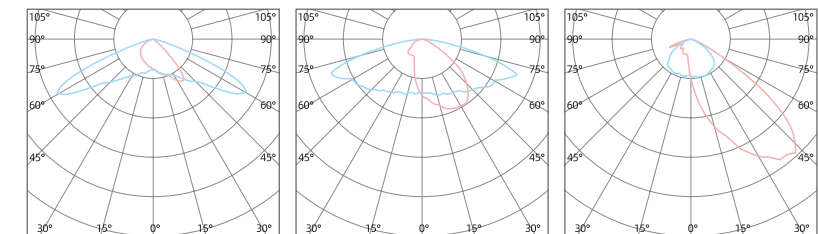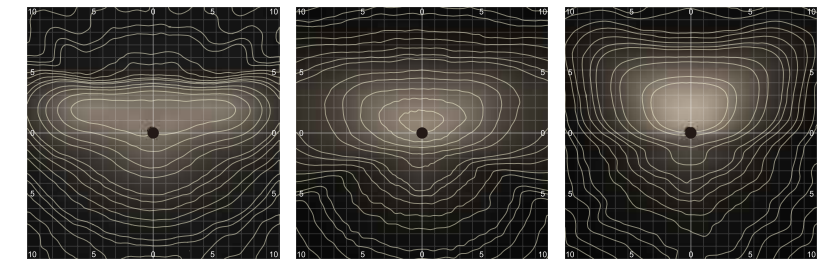


T15 安装高度4M T2M 安装高度4M T2S 安装高度4M









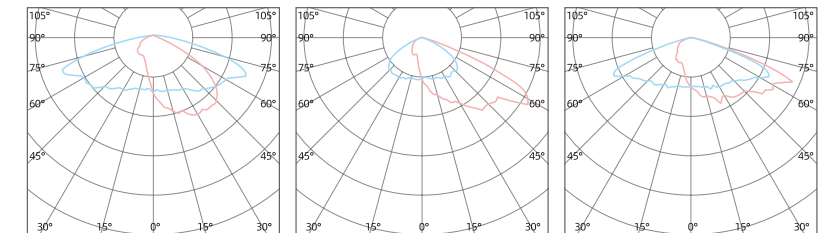
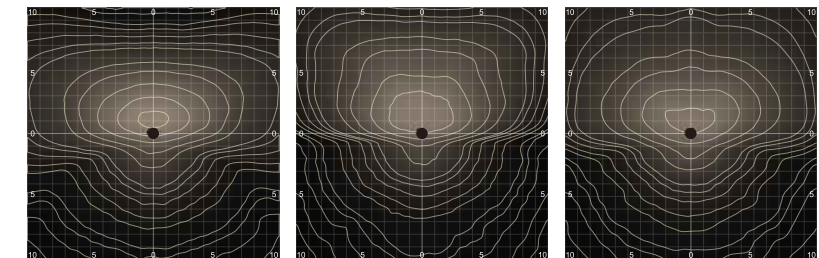


T3M 安装高度4M T3S 安装高度4M T4S1 安装高度4M

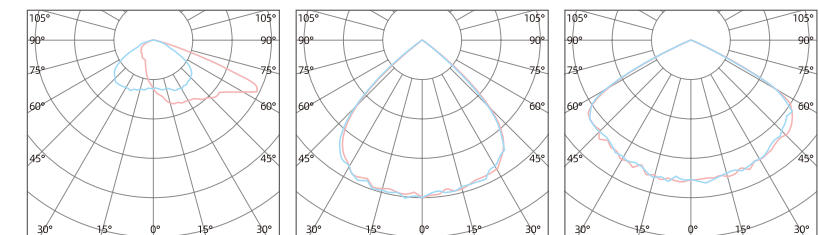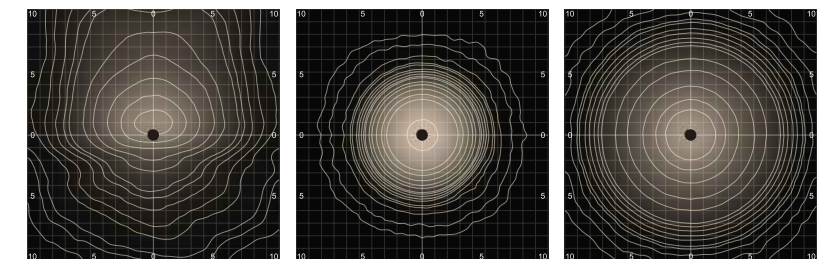

T4S2 安装高度4M 90° 安装高度4M 120° 安装高度4M

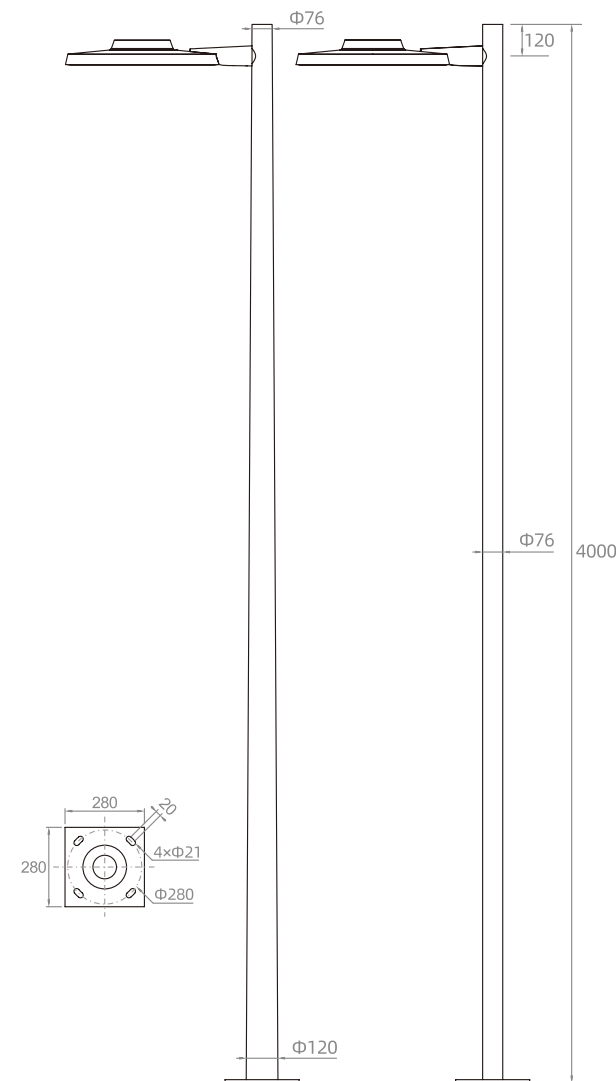

选型类别码 Class Code	透镜角度 Angle	功率 (W)				基础型号 Type	光源分布 LED Configuration
		30	60	90	120		
AI 情景照明 Ambient Mood	Ha-Ro	×	×	×	○	L07D-120AP0.5S	
		×	×	×	○	L07D-120BP0.5S	
		×	×	×	○	L07D-120CP0.5S	
UL 柔和匀光 Soft Uniform	T3C	○	×	×	×	L07D-030AP0.5S	
		×	○	×	×	L07D-060AP0.5S	
		×	×	○	×	L07D-090AP0.5S	
		×	×	×	○	L07D-120AP0.5S	
		○	×	×	×	L07D-030BP0.5S	
						L07D-030CP0.5S	
		×	○	×	×	L07D-060BP0.5S	
						L07D-060CP0.5S	
		×	×	○	×	L07D-090BP0.5S	
						L07D-090CP0.5S	
		×	×	×	○	L07D-120BP0.5S	
						L07D-120CP0.5S	
DL 光学分布 Optical Distribution	T1S / T2M / T2S / T3M / T3S / T4S1 / T4S2 / 90° / 120°	○	×	×	×	L07D-030AP0.5S	
		×	○	×	×	L07D-060AP0.5S	
		×	×	○	×	L07D-090AP0.5S	
		×	×	×	○	L07D-120AP0.5S	
		○	×	×	×	L07D-030BP0.5S	
						L07D-030CP0.5S	
		×	○	×	×	L07D-060BP0.5S	
						L07D-060CP0.5S	
		×	×	○	×	L07D-090BP0.5S	
						L07D-090CP0.5S	
		×	×	×	○	L07D-120BP0.5S	
						L07D-120CP0.5S	

