欧锐杰照明®
OURUIJIE LIGHTING

暮光
Twilight

WhatsApp　微信 WeChat　Web

浙江欧锐杰照明科技有限公司
ZHEJIANG OURUIJIELIGHTING TECHNOLOGY CO.,LTD.

ADD：浙江省湖州市紫荆路363号
No.363 Zijing Road, Huzhou, Zhejiang, China
TEL：+86-572-2671833
FAX：+86-572-2671800
P H: +86-15868233820
E-mail：quentin@orjlight.com
quentin.zong@foxmail.com

重塑经典 城市更新

RESHAPING CLASSICS, RENEWING CITIES

科学配光 抑制眩光

SCIENTIFIC LIGHT DISTRIBUTION TO SUPPRESS GLARE

便捷维护 解决痛点

CONVENIENT MAINTENANCE, ADDRESSING PAIN POINTS

本产品在灯具故障后可有两种方式进行维修更换，一种是更换LED灯头，另一种简约方式内置了E27灯座，可适配市场通用LED灯泡，解决了LED庭院灯具长期的维修难的痛点，大幅降低运维人力与时间成本。

This product offers two options for maintenance and replacement following a fixture failure: replacing the LED light head, or utilizing a simpler alternative—a built-in E27 socket compatible with standard off-the-shelf LED bulbs. This solution addresses the long-standing challenge of maintaining LED garden lights, significantly reducing the labor and time costs associated with operations and maintenance.

高防护性 高耐候性

HIGH PROTECTION, HIGH WEATHER RESISTANCE

抗紫外 UV-RESISTANT

高透 HIGHLY TRANSPARENT

抗老化 ANTI-AGING

耐用 DURABLE

IP66

改性 MODIFIED **PMMA**

灯罩选用高性能抗UV PMMA原料，长期户外经受日晒雨淋不易发黄、雾化、开裂可持续保持光线均匀通透，有效延长灯具外观使用寿命。渐变色柔光外罩依托漫射光学设计，光线温润柔和，兼顾高透光率与优异防眩光效果。

The lampshade is crafted from high-performance, UV-resistant PMMA, ensuring resistance to yellowing, clouding, and cracking during prolonged outdoor exposure to sun and rain. Featuring a gradient soft-light cover based on a diffusion-optimized optical design, it delivers a gentle, warm glow while balancing high light transmission with excellent anti-glare performance.

暮光 Twilight
LED庭院灯

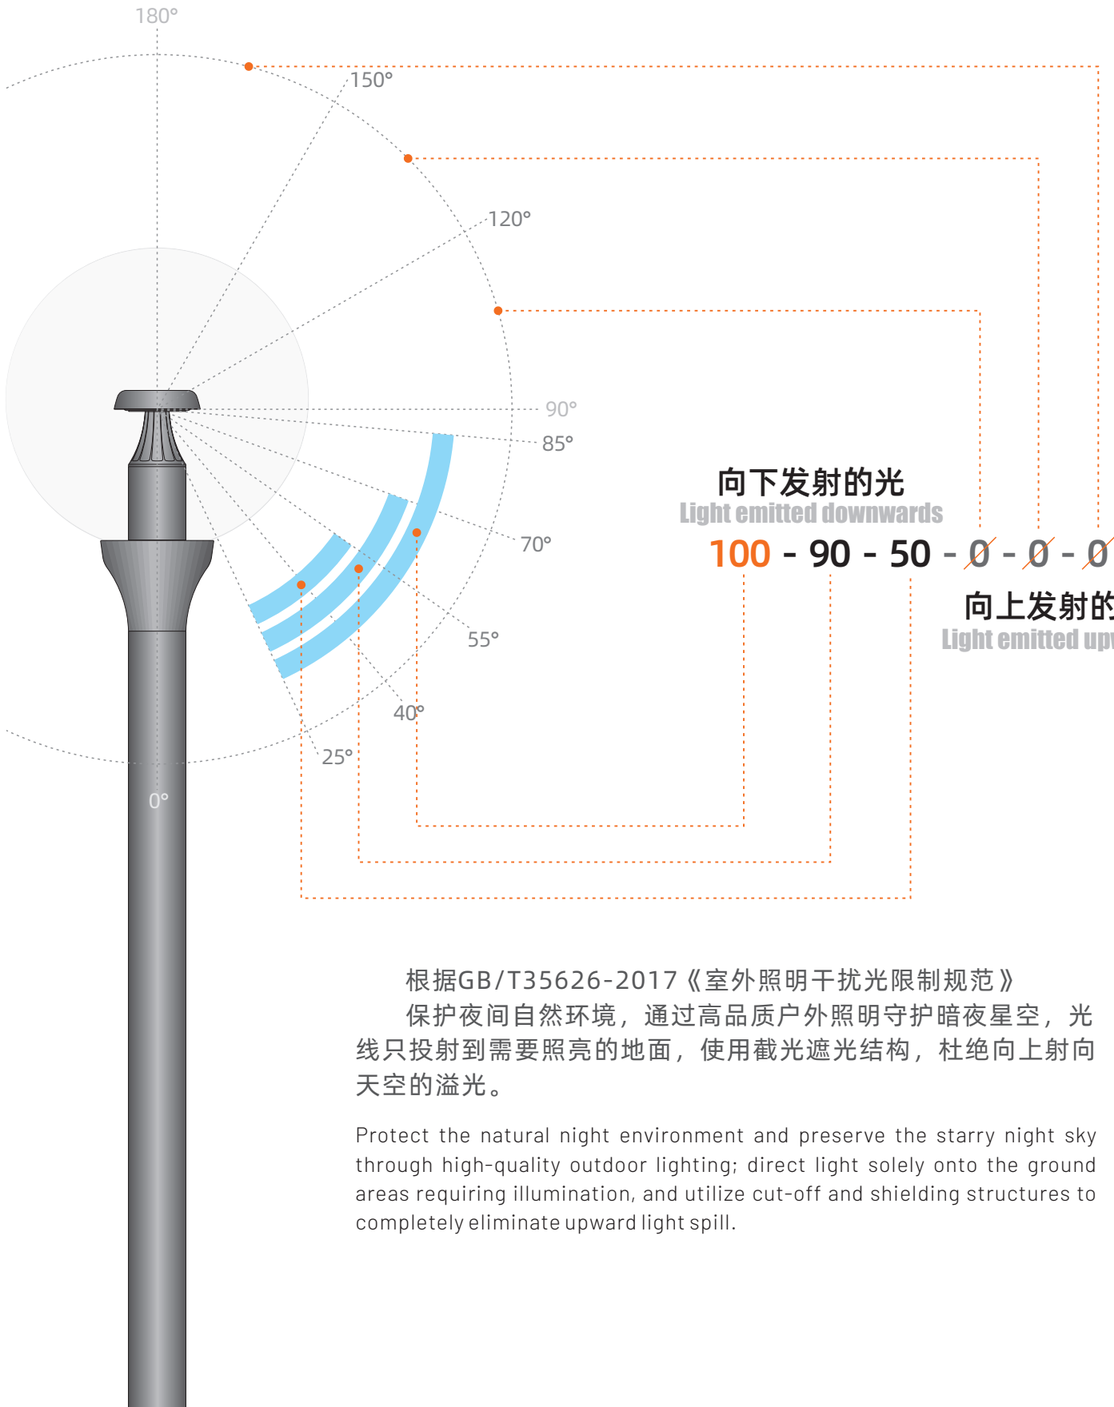

向下发射的光
Light emitted downwards

100 - 90 - 50 - 0 - 0 - 0

向上发射的光
Light emitted upwards

根据GB/T35626-2017《室外照明干扰光限制规范》

保护夜间自然环境，通过高品质户外照明守护暗夜星空，光线只投射到需要照亮的地面，使用截光遮光结构，杜绝向上射向天空的溢光。

Protect the natural night environment and preserve the starry night sky through high-quality outdoor lighting; direct light solely onto the ground areas requiring illumination, and utilize cut-off and shielding structures to completely eliminate upward light spill.

欧锐杰照明®
OURUIJIE LIGHTING

改变色温和亮度以创造适合人与环境的光

ADJUST COLOR TEMPERATURE AND BRIGHTNESS TO CREATE LIGHTING SUITED TO PEOPLE AND THE ENVIRONMENT

暮光 Twilight
LED庭院灯

欧锐杰照明®
OURUIJIE LIGHTING

多种配光方案
MULTIPLE LIGHT DISTRIBUTION OPTIONS

标配2款标准光学配光曲线，可根据道路宽窄、步道照度需求、防眩光要求单独配光，适配窄路、宽人行道、景观分区等多种照明场景。

It comes standard with two optical light distribution profiles, allowing for independent configuration based on road width, walkway illuminance requirements, and glare control needs; it is suitable for various lighting scenarios, including narrow roads, wide sidewalks, and landscaped zones.

半朗伯配光
TYPE V

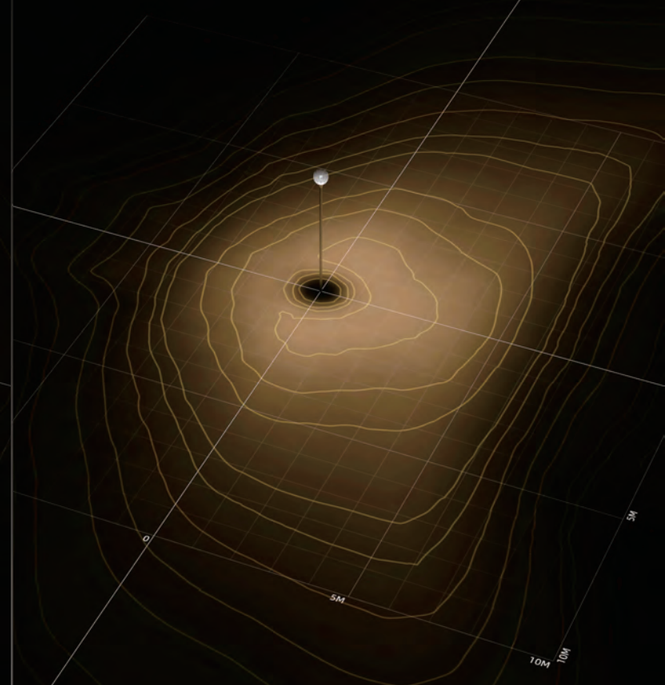

蝙蝠翼配光
BATWING

暮光 Twilight
LED庭院灯

欧锐杰照明®
OURUIJIE LIGHTING

多种形态 适应不同场景
MULTIPLE FORMS TO SUIT VARIOUS SCENARIOS

多层模块化灯芯设计（兼具多种配光要求/扩展功率较大）
Multi-layer modular light engine design

暮光系列LED庭院灯具备灵活多变的外形、功率和配光的组合，适合各种应用场景，布光随心所欲；采用分层灯芯组合结构，常规配置1～2层，单层功率 20W。

The Twilight series LED garden lights offer flexible combinations of form, wattage, and light distribution; multi-layer light engine design—typically configured with one or two layers—with a power output of 20W per layer.

L07C-A

L07C-B

L07C-C

暮光 Twilight LED庭院灯

L07C-A

欧锐杰照明®
OURUIJIE LIGHTING

L07C-048AP0.4M



2700/3000/3500/4000K

功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
20W	AC180-277V	1990lm	105×105° /40×140°	Φ76	2.1KG	Φ400×507mm	3.6kg 430×430×550mm(1pcs/box)







105×105° 安装高度H=3m



40×140° 安装高度H=3m

L07C-096AP0.4M



2700/3000/3500/4000K

功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
40W	AC180-277V	3980lm	105×105° /40×140°	Φ76	2.5KG	Φ400×507mm	4.0kg 430×430×550mm(1pcs/box)







105×105° 安装高度H=3m



40×140° 安装高度H=3m



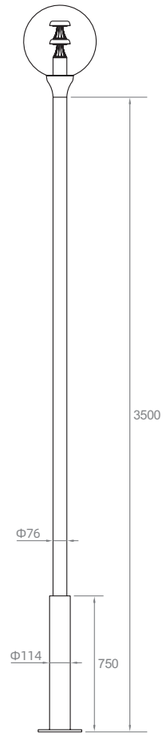

暮光 Twilight LED庭院灯

L07C-B

欧锐杰照明®
OURUIJIE LIGHTING

L07C-048BP0.4M



2700/3000/3500/4000K

功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
20W	AC180-277V	1990lm	105×105° /40×140°	Φ76	2.25KG	Φ400×620mm	3.75kg 430×430×670mm(1pcs/box)



105×105° 安装高度H=3m



40×140° 安装高度H=3m



105×105° 安装高度H=3m



40×140° 安装高度H=3m

L07C-096BP0.4M



2700/3000/3500/4000K

功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
40W	AC180-277V	3980lm	105×105° /40×140°	Φ76	2.65KG	Φ400×620mm	4.15kg 430×430×670mm(1pcs/box)



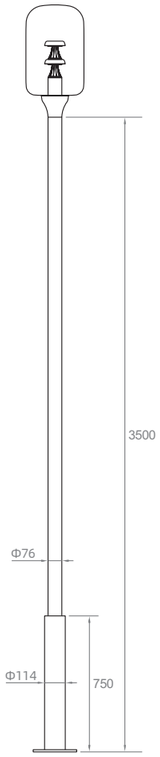



105×105° 安装高度H=3m



40×140° 安装高度H=3m





L07C-048B-A

L07C-048B-B

暮光 Twilight LED庭院灯

L07C-C

欧锐杰照明® OURUIJIE LIGHTING

L07C-048CP0.4M



2700/3000/3500/4000K

功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
20W	AC180-277V	1990lm	105×105° /40×140°	Φ76	2.1KG	Φ400×520mm	3.6kg 430×430×570mm(1pcs/box)







105×105° 安装高度H=3m



40×140° 安装高度H=3m

L07C-096CP0.4M



2700/3000/3500/4000K

功率 Power	输入电压 Input Voltage	光通量 Luminous Flux	发光角度 Angle	安装方式 Installation Method	灯具净重 Net Weight	灯具尺寸 Size	毛重/包装尺寸 Gross Weight/Packaging Size
40W	AC180-277V	3980lm	105×105° /40×140°	Φ76	2.5KG	Φ400×520mm	4.0kg 430×430×570mm(1pcs/box)

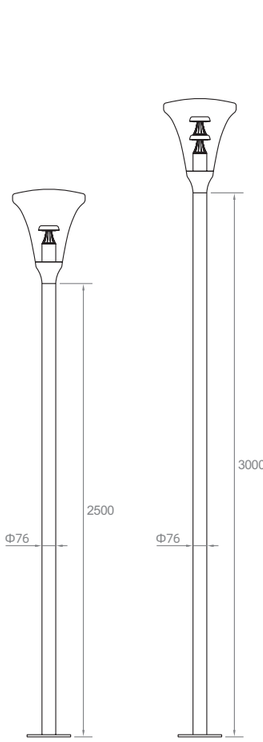









105×105° 安装高度H=3m



40×140° 安装高度H=3m

欧锐杰照明®
OURUIJIE LIGHTING

暮光草坪系列

TWILIGHT LAWN SERIES

专为城市更新照明提升打造，适配公园步道、文旅小镇、老旧街区、步行街等场景应用，兼顾经典风格与先进照明技术一体的步道照明解决方案。

A pathway lighting solution designed specifically for urban renewal and lighting upgrades; suitable for applications such as park trails, cultural tourism towns, historic neighborhoods, and pedestrian streets.

L07C-024D-A　L07C-024D-B　L07C-024D-C　L07C-024D-D

暮光 Twilight
LED庭院灯

欧锐杰照明
OURUIJIE LIGHTING

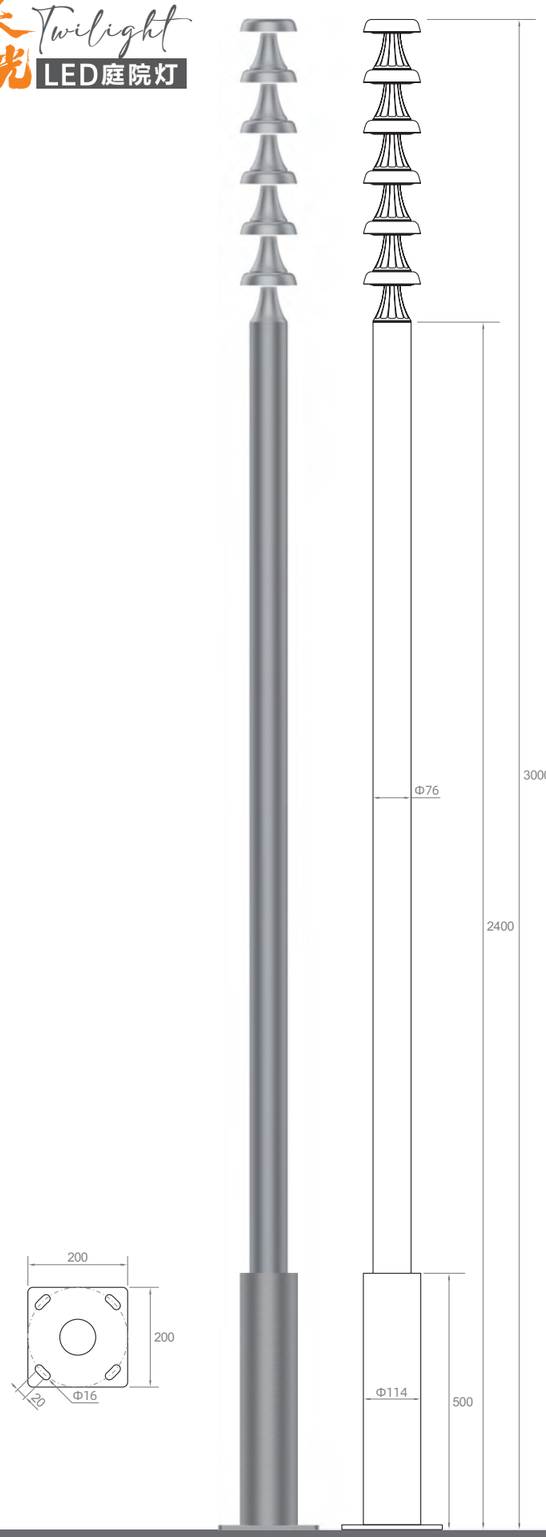

L07C-048E*6

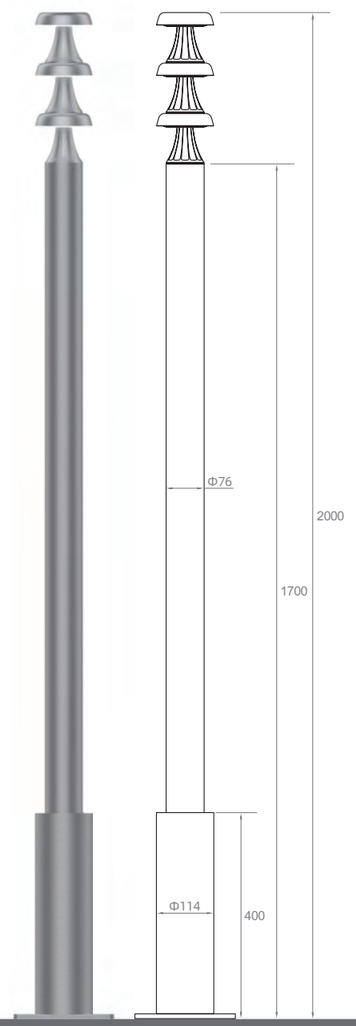

L07C-048E*3

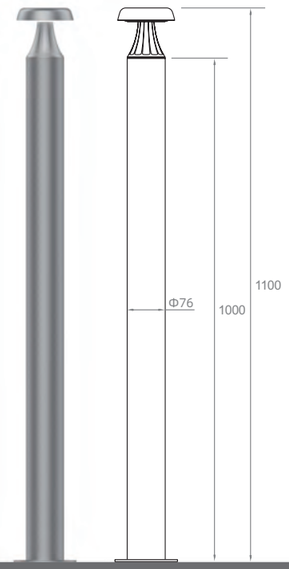

L07C-048E*1

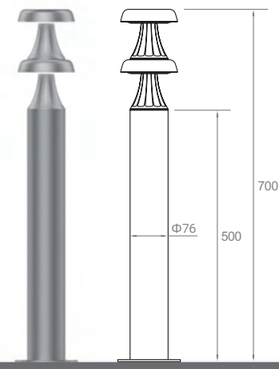

L07C-024D*2-A

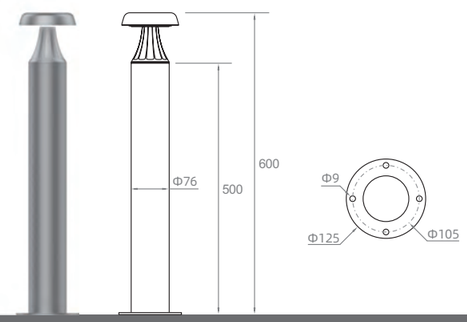

L07C-024D-A